

SPREADER N-200

TECHNICAL SPECIFICATIONS | EQUIPMENT



WARRANTY
24 months



WARRANTY
48 months
on galvanised parts

Year of model 2022

CynkoMet[®]
Czarna Białostocka

TECHNICAL SPECIFICATIONS	
Administrative loading capacity	800 kg
Technical loading capacity	800 kg
Gross vehicle weight rating according to PL regulations	1320 kg
Unladen mass	~ 520 kg
Number of axles	1
Adapter	A2H - 2 horizontal shafts
Length	3,020 mm
Width	1,400 mm
Height	Transport/working speed 1100 / 1730 mm
Length of loading space ext. (góra)	1,560 mm
Width of loading box interior	700 mm
Height of loading box walls	520 mm
Height of platform from base	480 mm
Loading height	990 mm
Floor/wall sheet thickness	3 / 3 mm
Conveyor drive	Mechanical, with road wheel
Adapter drive	Mechanical, with road wheel
Openable side walls	No
DETAILED SPECIFICATIONS	
Loading capacity (loading 5cm above the side walls)	0.6 m3
Track of wheels	1,170 mm
Suspension	Rigid axle
Max. drawbar eye load	120 kg
Drawbar coupling height - bottom position	350 mm
Max. tolerable axle load	1,200 kg
Tyre size	23x8.5-12
Design speed	15 km/h
Minimum demand for tractor power	14.7kW/20KM
Spreading width depending on manure used	~1 m

STANDARD MACHINE EQUIPMENT

Structural elements

Wall height 520 mm - hot-dip galvanised

A2H blade adapter powered by driving wheels

Galvanised sheet metal floor

Hot-dip galvanised drawbar

Conveyor and adapter drive from spreader wheels. Conveyor drive with adjustable feed speed.

The rear wall in front of the adapter is hot-dip galvanised

Hot-dip galvanised adapter cover

Adapter cover folded over the front of the spreader to protect the operator

Ball hitch k50

Construction

Collapsible drawbar support with rubber-coated wheel


Hot-dip galvanised conveyor chain

Replaceable hot-dip galvanised conveyor slats

Chassis

New wheels 23x8.5-12

Differential for easy manoeuvring

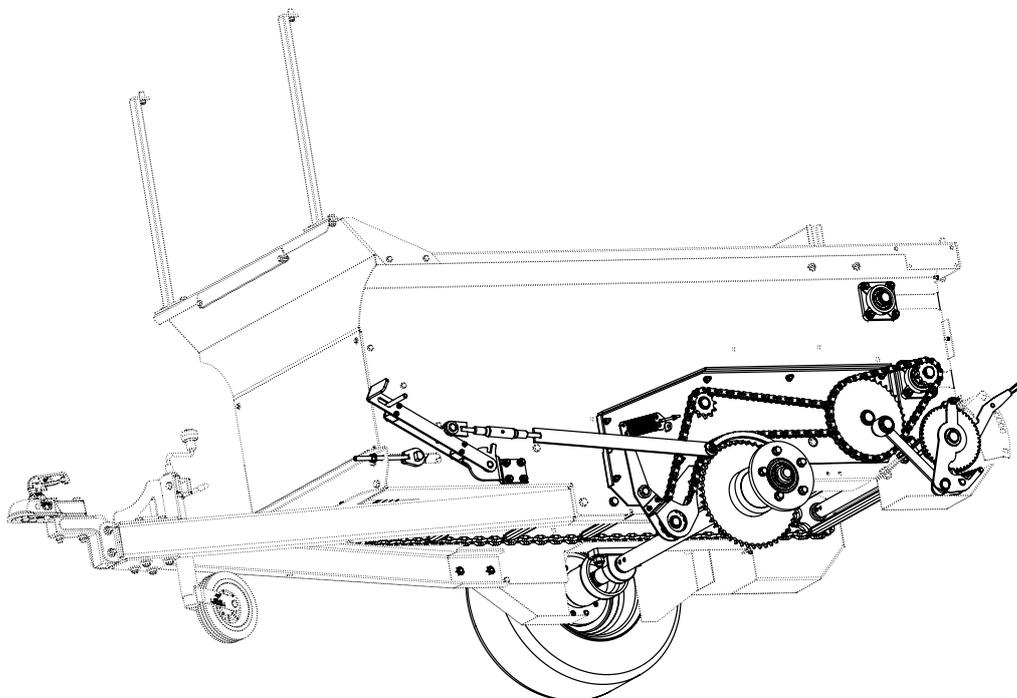

*All of our agricultural machines are designed and tested by our design team using the latest available tools.
Manufacturing is performed with the greatest diligence and in adherence to rigorous quality standards.*

Manure spreader N-200 | **800KG**

OPTIONAL MACHINE EQUIPMENT

Eye hitch 40mm or 50mm

Warning triangle

The data and photographs given in the catalogue are for illustrative purposes only. This document and the information it contains, including prices, do not constitute a commercial offer within the meaning of Article 66 of the Civil Code. This information may be subject to change as products are continuously improved. We reserve the right to change a product's characteristics at any time. Products' specifications may change without notice. Realization of an order begins when a person from our sales department confirms the data contained in the order form.



HOT-DIP GALVANISED
CONSTRUCTION

| Manure spreader N-200 | **800KG**

